

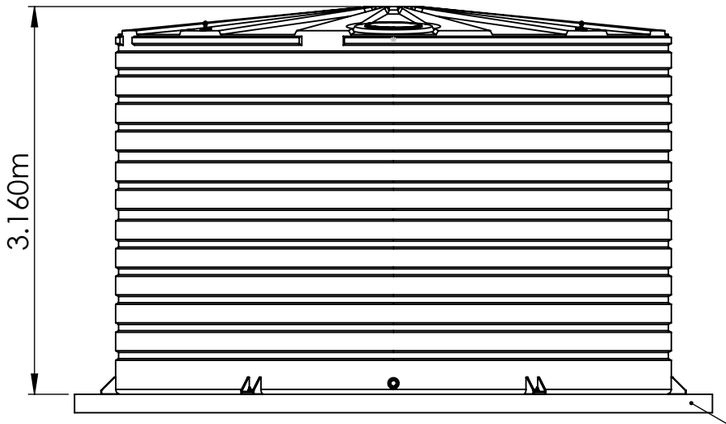


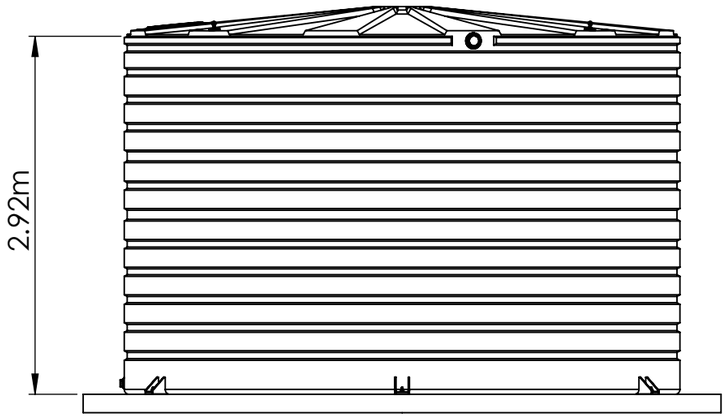

SUITABLE CONCRETE FOUNDATION


Lifting Information:
Lifting eyebolt design to suit a min.1T dee shackle with compliance to AS2741 or a min. 1T self locking hook compliant to AS3776 or AS3777.
SG1.0 WLL 1100kg using all four lugs.
Lift empty tank only.
Use certified lifting equipment only Max. 60° between diagonal chains/slings.
Ensure all chains/slings are tensioned before lifting.

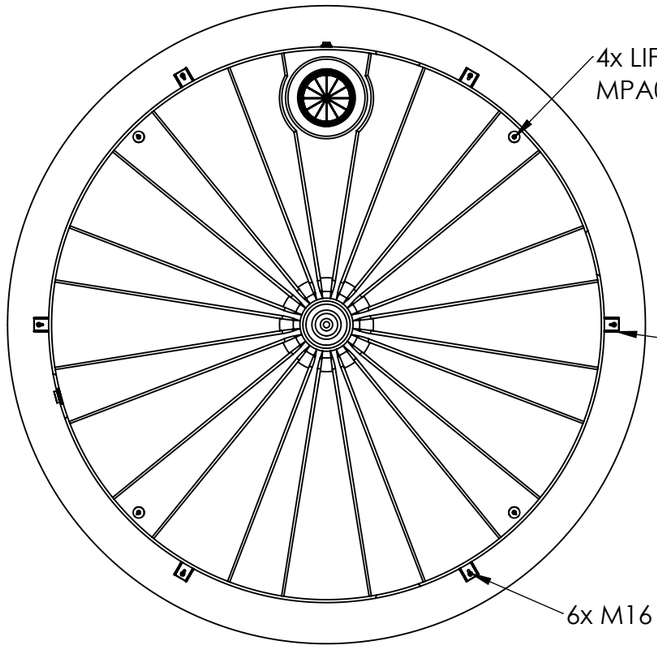

4x LIFTING LUGS (OPTIONAL)
MPA012A-2

6x BUSHMANS
HOLD DOWN LUGS

6x M16 CONCRETE ANCHOR

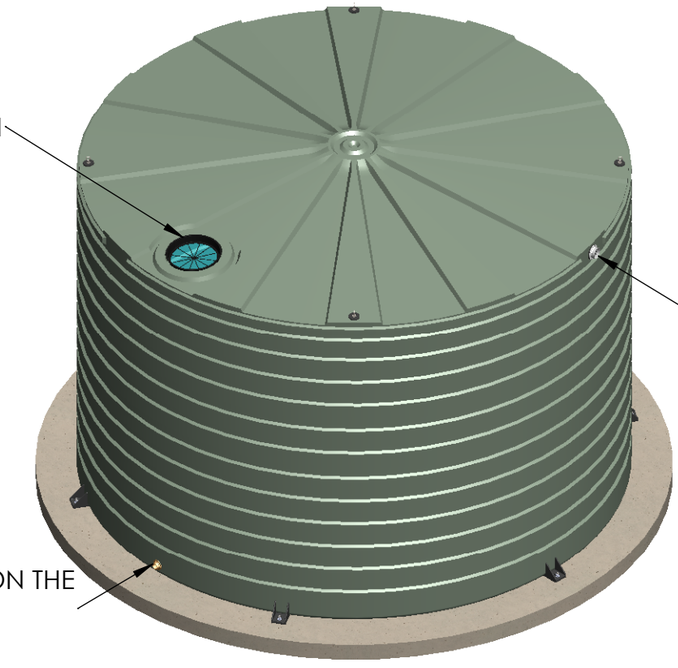

STRAINER LOCATION

TANK OVERFLOW
ANYWHERE ON THE RIB

TANK OUTLET
ANYWHERE ON THE
BOTTOM RIB

CALCULATED CAPACITY: 46500 L

IMPORTANT NOTES TO READ...!!!

- **2 PERSONS + DRIVER REQUIRED TO HANDLE TANK.**
- Drawing shows all available outlet & overflow positions. Standard intallations have only 1 outlet & 1 overflow.
- Please refer to 'Easy 6 Step Tank Installation Guide' for instruction to install accessories.
- All dimensions are in Metres and rounded to the nearest Centimetre.
- Capacities & measurements are tested in accordance with AS4766, but may vary due to roto-moulding process.
- Bushmans recommends top and sides clearance of 100mm minimum when estimating space required for tank.

Bushmans

BUSHMANS GROUP PTY LTD
BUSHMANS HEAD OFFICE
GPO 4218, NSW, SYDNEY, 2001 WWW.BUSHMANTANKS.COM.AU

Copyright 2024 Bushmans Group Pty Ltd. This drawing may not be reproduced or transmitted in any form or by any means in part or whole without written permission of Bushmans Group Pty Ltd.

Drawn: TP	Project Title: T10500 V002	Drawing Title: TXD10500 - Region C 46 400 LITRE TANK TANK SALES DRAWING	
Date: 22/04/2024	Material: POLYETHYLENE		
Scale: NOT TO SCALE	Finish:		

A3 Size Drawing