

Bushmans Flex50to25Kit Install Guide – 50mm Outlet

Step 1

50to25mm Plastic Reducer Fitting

- Using Thread Tape, screw Elbow Fitting into Ball Valve.

Tank Outlet & Ball Valve – as installed by **Bushmans**

Step 2

25mm Plastic Elbow Fitting

- Using Thread Tape, screw Elbow Fitting into Ball Valve.

Step 3

25mm Plastic Coupling

- Using Thread Tape, screw Coupling into Elbow Fitting.
- Push Hose onto barb side of Coupling.
- Screw Lock-nut until tight on Hose.

Step 5

1M x 25mm Dia. Flex Hose

- Push Hose onto barb side of Coupling.
- Screw Lock-nut until tight on Hose.

Typical Bianco Pump

Step 4


25mm Plastic Coupling

- Using Thread Tape, screw Coupling into intended Pump Inlet, Adaptor or Appliance.

Bushmans Flex50to25Kit Install Guide – 50mm Outlet

Step 6

Flex50to25Kit is now installed and ready for use.

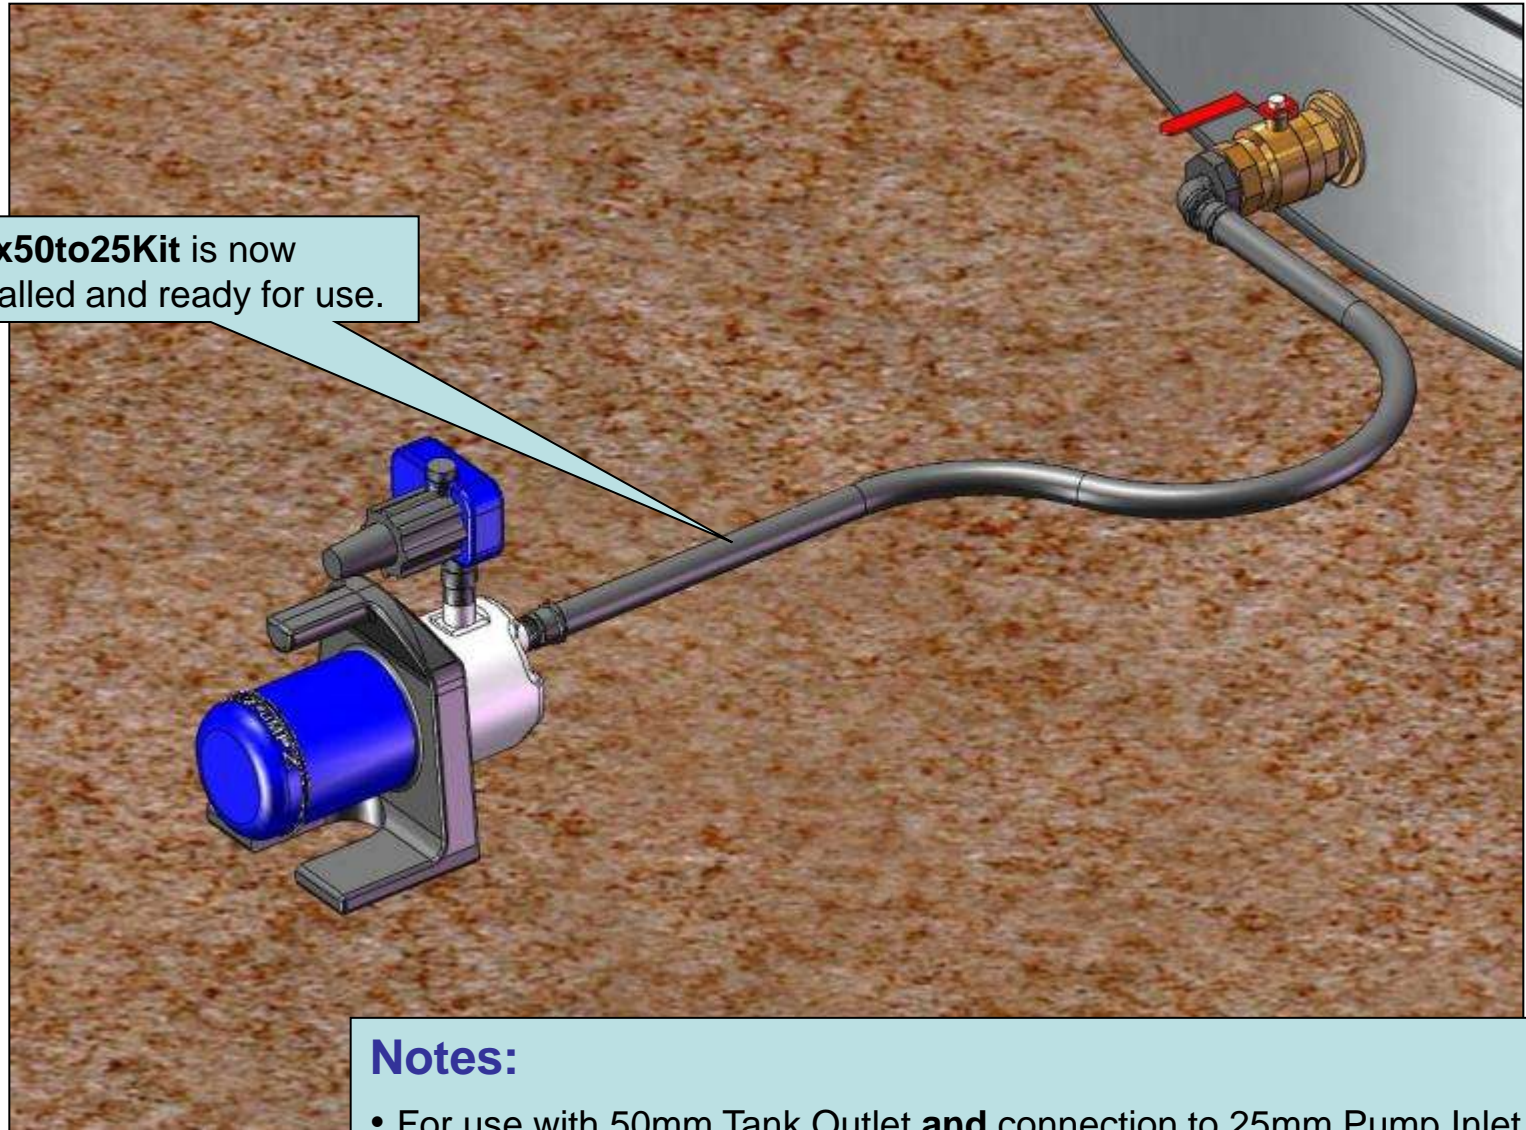

Notes:

- For use with 50mm Tank Outlet and connection to 25mm Pump Inlet.
- All components are Food Grade Approved or Water-Marked.

Bushmans Flex50Kit Install Guide – 50mm Outlet

Step 1

50mm Plastic Elbow Fitting

- Using Thread Tape, screw Elbow Fitting into Ball Valve.

Tank Outlet & Ball Valve – as installed by **Bushmans**

Step 2

50mm Plastic Coupling

- Using Thread Tape, screw Coupling into Elbow Fitting.
- Push Hose onto barb side of Coupling.
- Screw Lock-nut until tight on Hose.

Step 3

50mm Plastic Coupling

- Using Thread Tape, screw Coupling into intended Adaptor or Appliance.

Step 4


1M x 50mm Dia. Flex Hose

- Push Hose onto barb side of Coupling.
- Screw Lock-nut until tight on Hose.

Bushmans Flex50Kit Install Guide – 50mm Outlet

Step 5

Flex50Kit is now installed and ready for use.

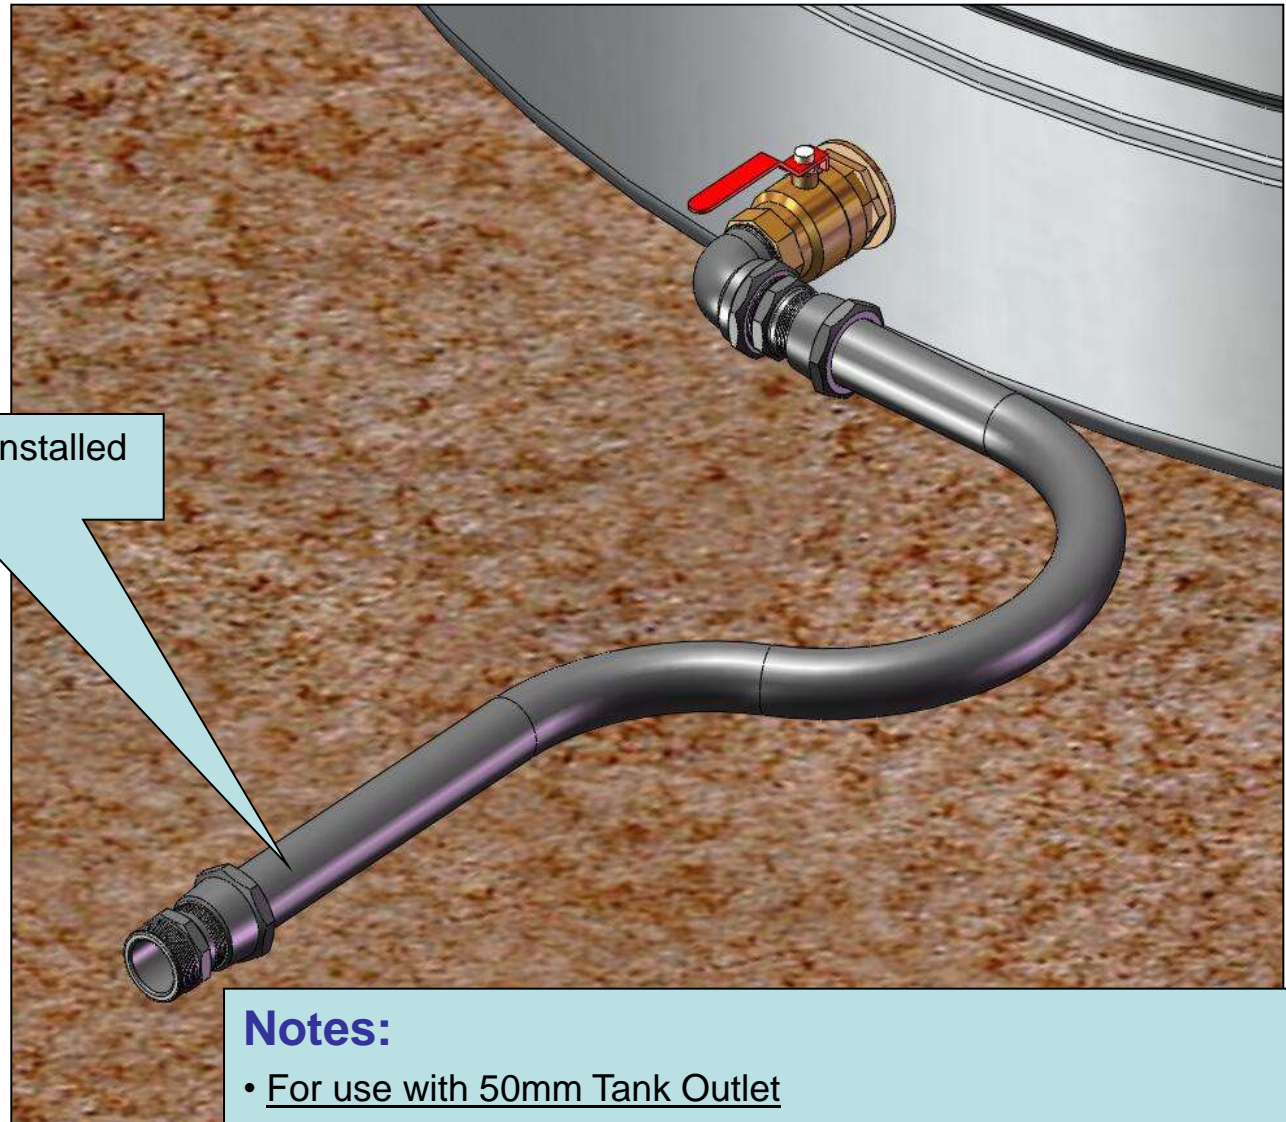

Notes:

- For use with 50mm Tank Outlet
- All components are Food Grade Approved or Water-Marked.
- Use of Elbow Fitting is optional.

Bushmans Flex25Kit Install Guide – 25mm Outlet

Step 1

25mm Plastic Elbow Fitting

- Using Thread Tape, screw Elbow Fitting into Ball Valve.

Tank Outlet & Ball Valve – as installed by **Bushmans**

Step 2

25mm Plastic Coupling

- Using Thread Tape, screw Coupling into Elbow Fitting.
- Push Hose onto barb side of Coupling.
- Screw Lock-nut until tight on Hose.

Step 3

25mm Plastic Coupling

- Using Thread Tape, screw Coupling into intended Adaptor or Appliance.

Step 4


1M x 25mm Dia. Flex Hose

- Push Hose onto barb side of Coupling.
- Screw Lock-nut until tight on Hose.

Bushmans Flex25Kit Install Guide – 25mm Outlet

Step 5

Flex25Kit is now installed and ready for use.

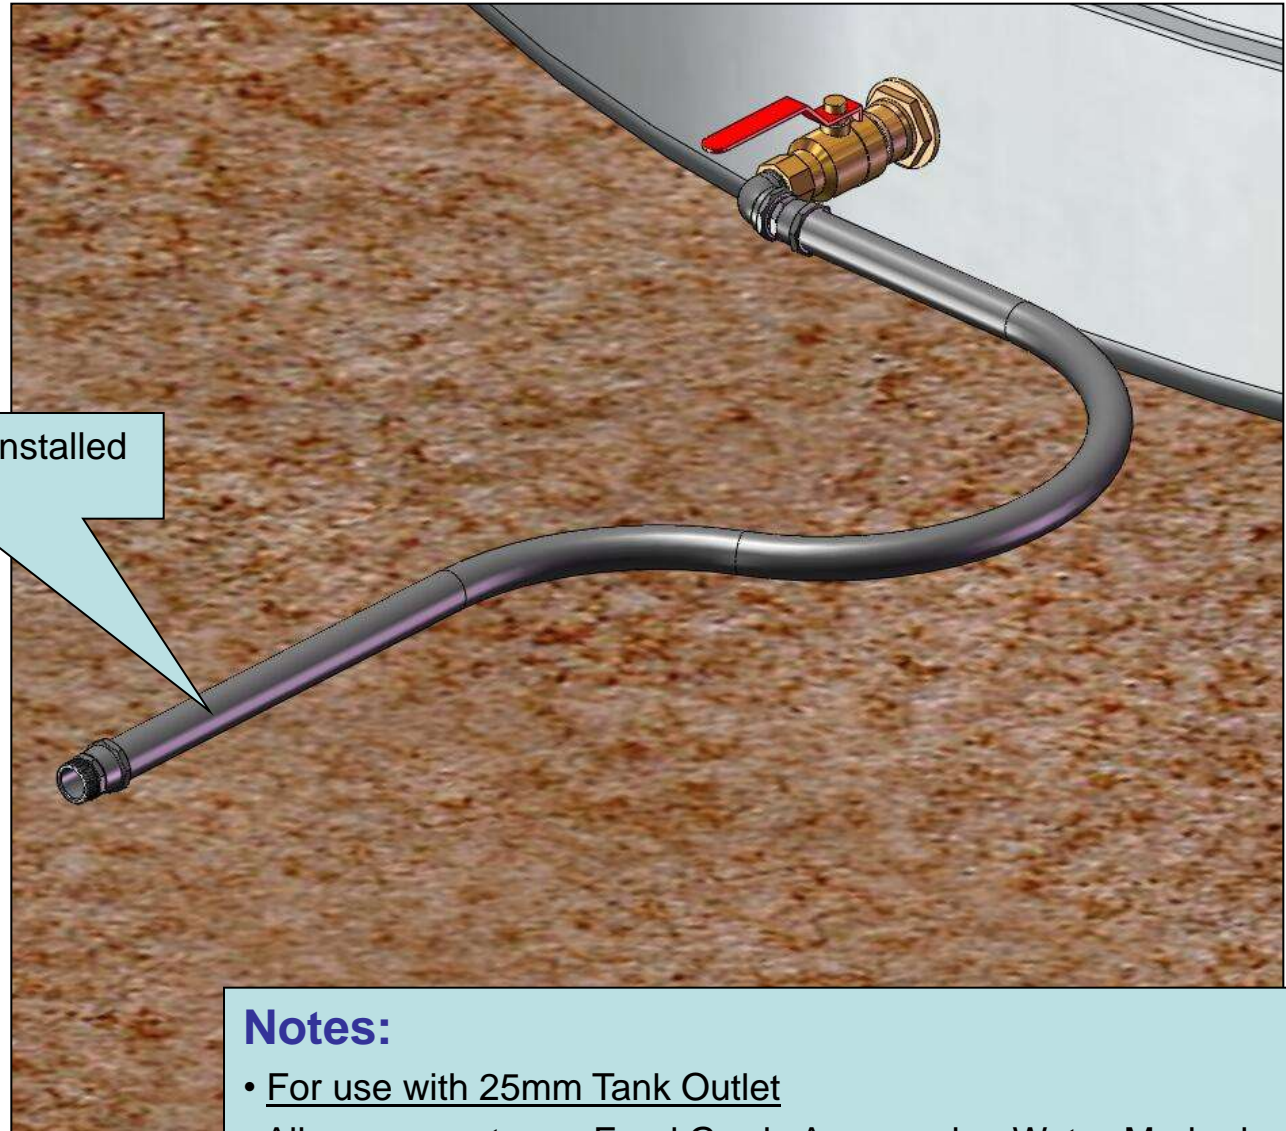

Notes:

- For use with 25mm Tank Outlet
- All components are Food Grade Approved or Water-Marked.
- Use of Elbow Fitting is optional.