

DOMESTIC WATER SUPPLY PRESSURE PUMP

HORIZONTAL MULTISTAGE Pressure System Pumps

FEATURES


- Self Priming
- Stops automatically when the last tap is turned off
- Starts automatically when a tap is turned on
- Operates constantly from low flow to full flow
- Run dry protection
- Corrosion resistant stainless steel construction
- Auto Re-Start Controller, automatically looks for water if pump runs out of water.

COMMON APPLICATIONS

- Domestic water supply for holiday homes or cottages
- Domestic Irrigation and car washing
- General water transfer systems
- Supports 11 taps (8 l/m) at one time



Performance Curve Multistage 900 / 1300 PC

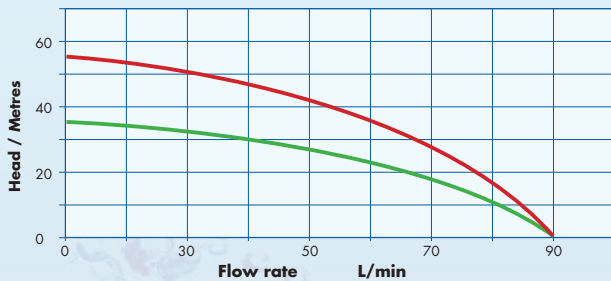

Model/Part No	Nominal Pressure	Flow l/m at Total Suction Head m				Settings kPa	Max Pump Pressure	Connections Inlet x Outlet	Package Dimensions	Weight kg	RRP (inc 10% GST)
		0	3	5	6						
BIA-MULTI900PC	120 kPa, 17 psi	80	76	72	69	120-352	352 kPa	25 mm x25 mm	415(L) x 280(W) x 470 mm(H)	12.1	\$
BIA-MULTI1300PC	120 kPa, 17 psi	83	76	72	69	120-548	548 kPa	25 mm x25 mm	460(L) x 280(W) x 470 mm(H)	15.7	\$

Disclaimer: Every effort has been made to publish the correct details in this brochure. No responsibility will be taken for errors, omissions or changes in product specifications.

Technopolymer Automatic Pressure System

FEATURES

- Self Priming
- Technopolymer
- Operates constantly from low to full flow
- Stops automatically when the last tap is turned off
- Auto control starts automatically when a tap is turned on



Model / Part No	Body Material	Taps	Max Flow lpm	Max Suction Lift (m)	Nominal Pressure	Max discharge head	Dimensions	Weight	RRP (inc 10% GST)
BIA-TECH40PC	Technopolymer	2 to 3 TAPS	25	6	120 kPa 17psi	27m	365(L) x 225(W) x 420 mm(H)	7.1 kg	\$

Stainless Steel Automatic Pressure Systems

FEATURES

- Self Priming
- Stainless Steel
- Operates constantly from low to full flow
- Stops automatically when the last tap is turned off
- Auto control starts automatically when a tap is turned on



*Note: The taps shown below have been calculated at 8 Litres per minute.

Model / Part No	Body Material	Taps	Max Flow lpm	Max Suction Lift (m)	Nominal Pressure	Max discharge head	Dimensions	Weight	RRP (inc 10% GST)
BIA-INOX60PC	Stainless Steel	3 to 4 TAPS	36	6	120 kPa 17psi	32m	365(L) x 225(W) x 420 mm(H)	9.1 kg	\$
BIA-INOX80PC	Stainless Steel	4 to 5 TAPS	43	6	120 kPa 17psi	40m	365(L) x 225(W) x 420 mm(H)	9.1 kg	\$
BIA-INOX120PC	Stainless Steel	5 to 6 TAPS	50	6	120 kPa 17psi	43m	365(L) x 225(W) x 420 mm(H)	9.8 kg	\$

Disclaimer: Every effort has been made to publish the correct details in this brochure. No responsibility will be taken for errors, omissions or changes in product specifications.