



# Fertiliser Storage Solutions



BUSHMANS is Australia's leading manufacturer of water, industrial and agricultural storage products with 21 years of manufacturing experience.

Our extensive research and testing of agricultural, industrial and chemical tanks has proven that BUSHMANS' tanks are strong and dependable over the long term. Designed and manufactured to the stringent requirements of the industry and the Australian climate, BUSHMANS' Fertiliser Tanks are robust and reliable for liquid fertiliser storage. Tanks come with all necessary inlet and outlet fittings plus level gauges.

Value options include blank tank with no accessories. Now available in capacities from 5000 litres to 38000 litres.

AS4766 Compliant Capacity		Product Code	Inlet Height	Diameter	Total Height	Availability				Accessory Information
Metric	Imperial					QLD	NSW	VIC	SA	
5000L	1100gal	TF1100	2.05m	1.85m	2.25m	*	*	*	*	Option Fitout #1 63mm Riser Pipe with Camlock and Dust Caps 50mm Banjo Inlet and Outlet Valves Float Level Indicator 620mm Vented Lid 90mm Overflow
10000L	2200gal	TF2300	2.16m	2.59m	2.31m	*	*	*	*	
15000L	3300gal	TF3300	2.20m	3.05m	2.44m	*	*	*	*	
22500L	5000gal	TF5000	2.12m	3.73m	2.44m	*	*	*	*	Option Fitout #2 63mm Riser Pipe with Camlock and Dust Caps 80mm Banjo Inlet and Outlet Valves Float Level Indicator 620mm Vented Lid 90mm Overflow
30000L	6600gal	TF6500	2.68m	3.92m	2.87m	*	*	*	*	
38000L	8400gal	TF8400	2.71m	4.37m	2.82m	*	*	*	*	

Capacities and measurements are tested in accordance with AS/NZS4766, but may vary due to the roto-moulding process. Dimensions in metres are rounded to the nearest centimetre. When estimating space requirements for siting your tank, BUSHMANS recommends a minimum clearance of 100mm at top and sides.

### Tank Features

- Heavy duty moulded tank capable of storing materials with an SG rating of up to 1.5.
- Robust welded riser pipe allowing for ongoing reliable refilling of the tank.
- High quality camlocks sealing the tank from dust and other foreign bodies that attempt to enter the tank through fittings.
- Banjo Outlet Valve providing a reliable service.
- Stainless float level indicator providing accurate measurement and protection against corrosion.
- Vented lid, sealing the tank whilst allowing air in during the unloading process.
- Advanced generation polyethylene raw material used to manufacture the whole tank in one piece.
- Comprehensive five year industrial guarantee you can rely on.

**Bushmans local sales office**  
1800 00 88 88



**New South Wales**  
18 Colliers Avenue  
Orange NSW 2800

**Victoria**  
Cobden Road  
Terang VIC 3264

**South Australia**  
15 CB Fisher Drive  
Cavan SA 5094

**Queensland**  
8 Cooper Street  
Dalby QLD 4405

**Web**  
bushmantanks.com.au

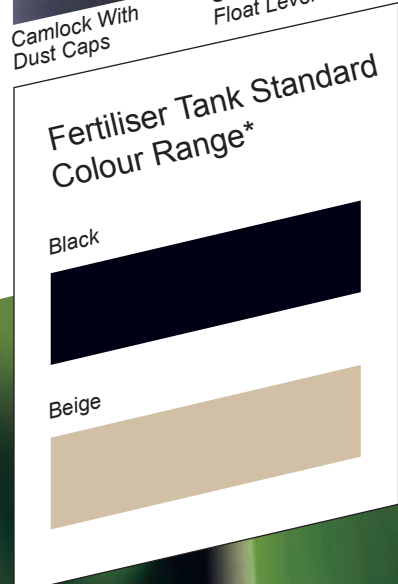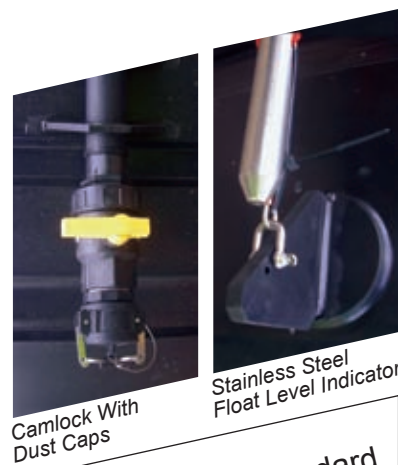

To discuss all your farm storage solutions

**FREECALL**  
**1800 00 88 88**

\* Colours shown are a guide only. For true colour representation, please contact your Bushmans representative.