


TANK OVERFLOW
CAN BE POSITIONED
AROUND THE TANK

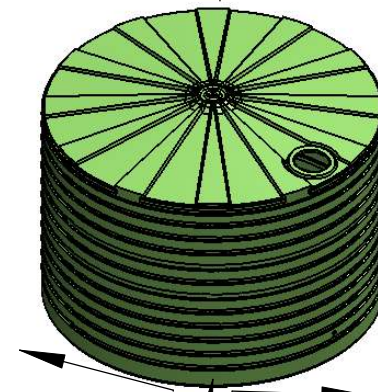

TANK OUTLET
ANYWHERE ON
BOTTOM RIB

IMPORTANT NOTES TO READ...!!!

- **6 PERSONS + DRIVER REQUIRED TO HANDLE TANK.**
- Drawing shows all available outlet & overflow positions. Standard installations have only 1 outlet & 1 overflow.
- Please refer to 'Easy 6 Step Tank Installation Guide' for instruction to install accessories.
- All dimensions are in Metres and rounded to the nearest Centimetre.
- Capacities & measurements are tested in accordance with AS4766, but may vary due to roto-moulding process.
- Bushmans recommends top and sides clearance of 100mm minimum when estimating space required for tank.

BUSHMANS SALES DRAWING

300 GEORGE STREET, SYDNEY, NSW 2000
Ph 1800 00 88 88 WWW.BUSHMANTANKS.COM.AU

Copyright 2011 Bushmans Group Pty Ltd. This drawing may not be reproduced or transmitted in any form or by any means in part or whole without written permission of Bushmans Group Pty Ltd.

Drawn BUSH ENG
Date JUL-2011
Scale Not to Scale

Project Title T10500 ROUND
Material POLYETHYLENE
Finish -----

Drawing Title
**T10500 ROUND
46400Litre Tank**

A4 Size Drawing

Sheet 1 of 3