


Lifting Information:
 Lifting lugs design to suit a bow shackle with 25mm pin and 43mm inside width
 SG1.0 WLL 680kg using all four lugs
 Lift empty tank only
 Use certified lifting equipment only
 Max. 60° between diagonal chains slings
 Ensure all chains/slings are tensioned before lifting

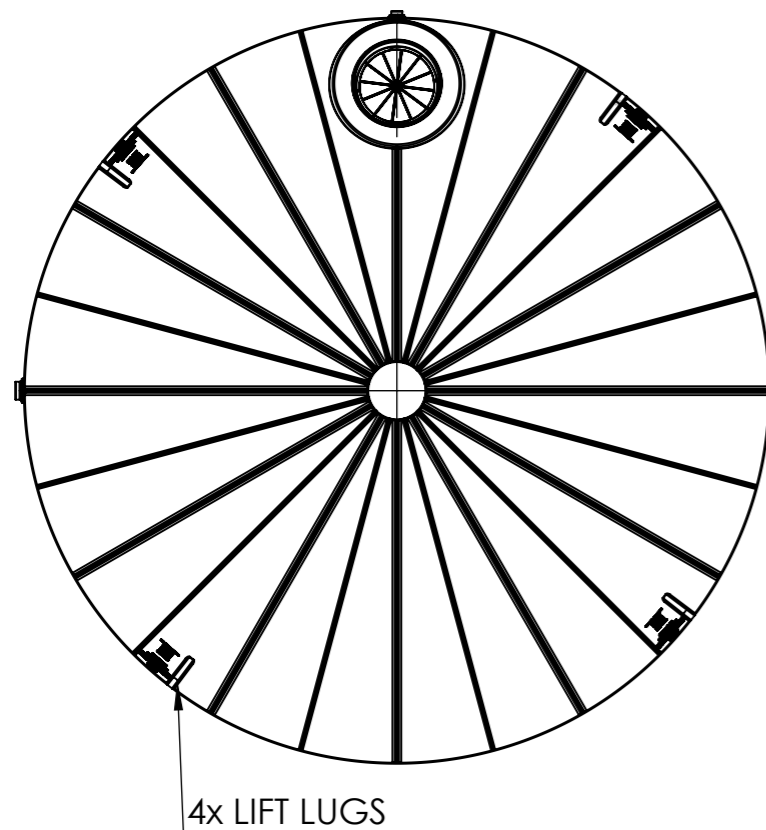

500mm STRAINER LOCATION

TANK OUTLET ANYWHERE ON THE BOTTOM RIB

TANK OVERFLOW ANYWHERE ON THE RIB

CALCULATED CAPACITY: 31 150 L

IMPORTANT NOTES TO READ...!!!

- **4 PERSONS + DRIVER REQUIRED TO HANDLE TANK.**
- Drawing shows all available outlet & overflow positions. Standard installations have only 1 outlet & 1 overflow.
- Please refer to 'Easy 6 Step Tank Installation Guide' for instruction to install accessories.
- All dimensions are in Metres and rounded to the nearest Centimetre.
- Capacities & measurements are tested in accordance with AS4766, but may vary due to roto-moulding process.
- Bushmans recommends top and sides clearance of 100mm minimum when estimating space required for tank.



BUSHMANS GROUP PTY LTD

BUSHMANS HEAD OFFICE

GPO 4218, NSW, SYDNEY, 2001 WWW.BUSHMANTANKS.COM.AU

Copyright 2021 Bushmans Group Pty Ltd. This drawing may not be reproduced or transmitted in any form or by any means in part or whole without written permission of Bushmans Group Pty Ltd.

Drawn TP

Date 10/10/2021

Scale NOT TO SCALE

Project Title

TXD 6500 V001

Material

POLYETHYLENE

Finish

Drawing Title

TXD6500
 30 000 LITRE TANK
 TANK SALES DRAWING

A3 Size Drawing