


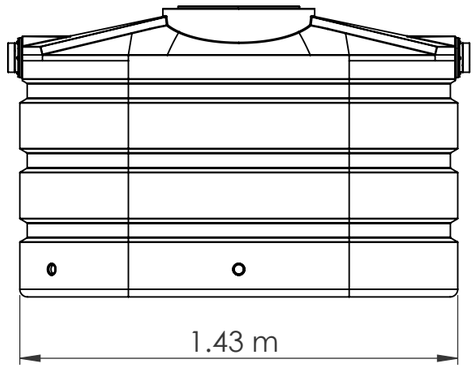


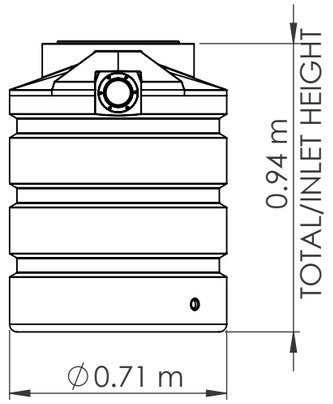

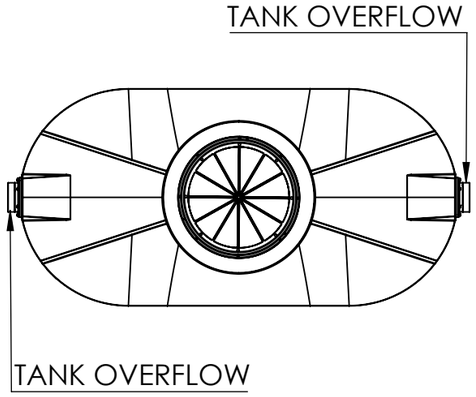

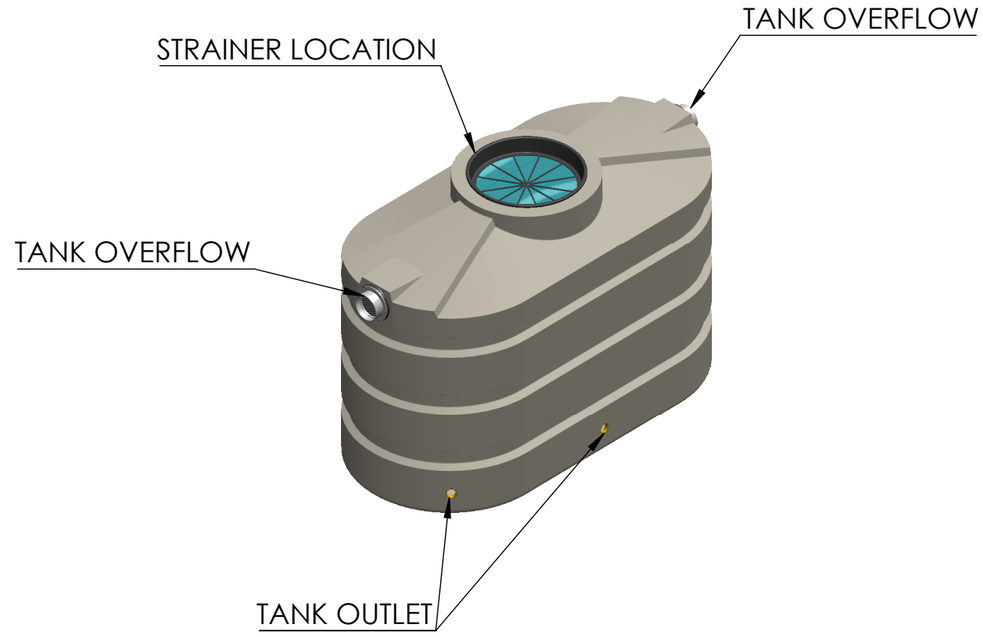

CALCULATED CAPACITY: 685 L

IMPORTANT NOTES TO READ...!!!

- **2 PERSONS + DRIVER REQUIRED TO HANDLE TANK.**
- Drawing shows all available outlet & overflow positions. Standard intallations have only 1 outlet & 1 overflow.
- Please refer to 'Easy 6 Step Tank Installation Guide' for instruction to install accessories.
- All dimensions are in Metres and rounded to the nearest Centimetre.
- Capacities & measurements are tested in accordance with AS4766, but may vary due to roto-moulding process.
- Bushmans recommends top and sides clearance of 100mm minimum when estimating space required for tank.

BUSHMANS GROUP PTY LTD

BUSHMANS HEAD OFFICE

GPO 4218, NSW, SYDNEY, 2001 WWW.BUSHMANTANKS.COM.AU

Copyright 2017 Bushmans Group Pty Ltd. This drawing may not be reproduced or transmitted in any form or by any means in part or whole without written permission of Bushmans Group Pty Ltd.

Drawn: TP	Project Title: TSL160 V002	Drawing Title: TSL160 ROUND 660L TANK TANK SALES DRAWING	
Date: 24/02/2017	Material: POLYETHYLENE		
Scale: NOT TO SCALE	Finish	A3 Size Drawing	Version: V2