


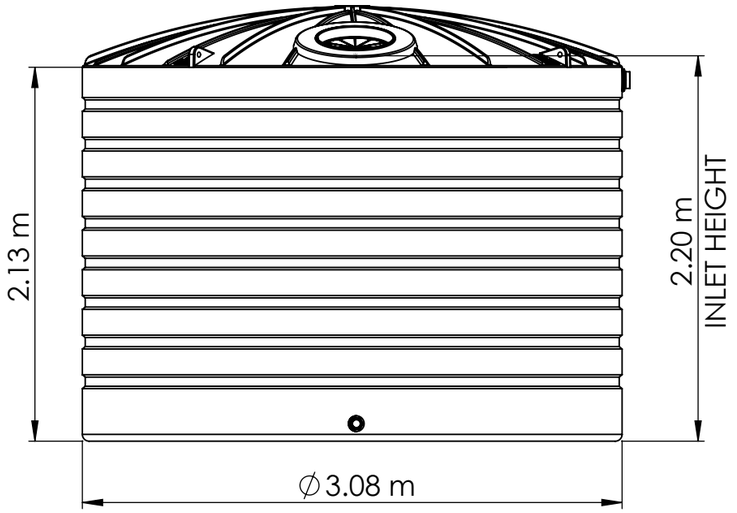


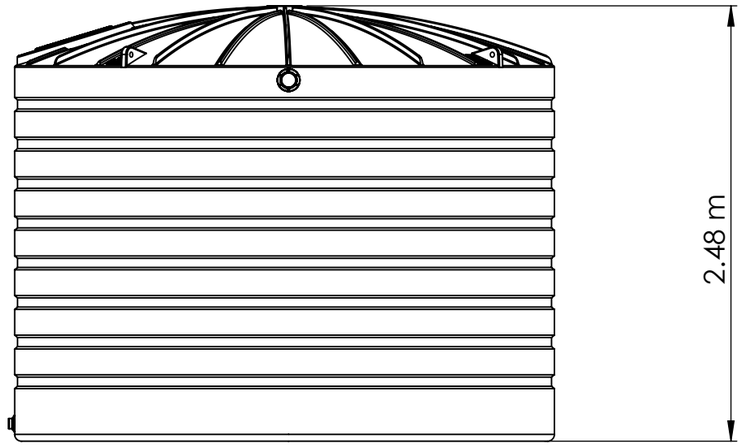

Lifting Information:
Lifting lugs design to suit a bow shackle
with 25mm pin and 43mm inside width.
SG1.0 WLL 400kg using all four lugs.
Lift only empty tank.
Use only certified lifting equipment.
Max. 60° between diagonal chains slings.
Ensure all chains/slings are tensioned.

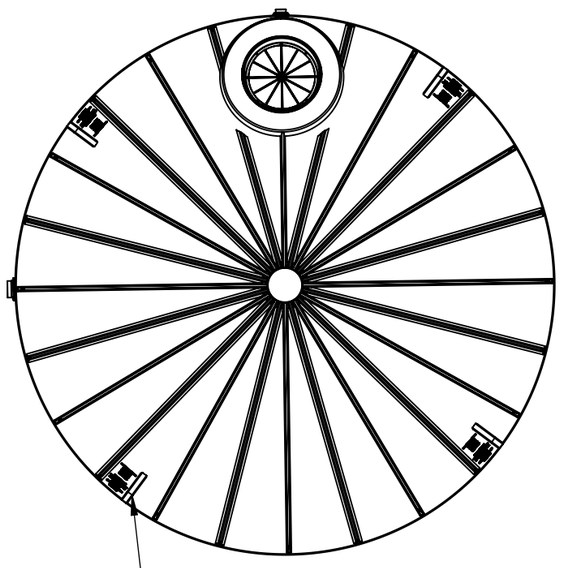

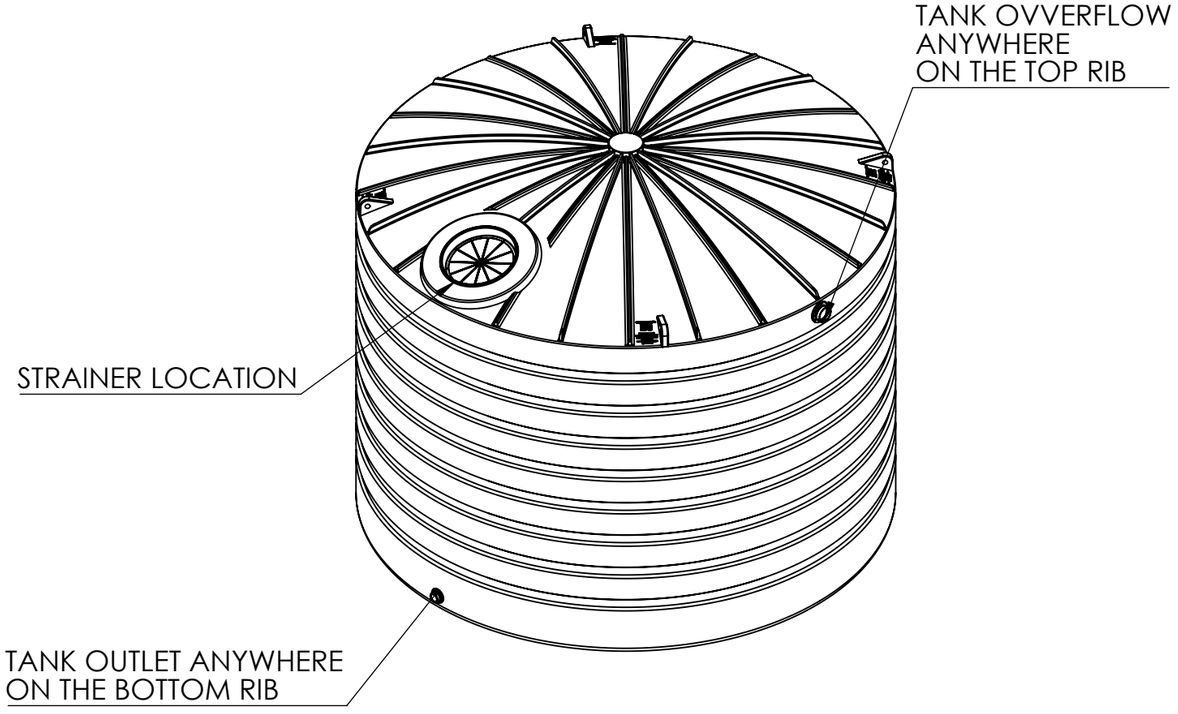

CALCULATED CAPACITY: 15300 L

IMPORTANT NOTES TO READ...!!!

- **2 PERSONS + DRIVER REQUIRED TO HANDLE TANK.**
- Drawing shows all available outlet & overflow positions. Standard intallations have only 1 outlet & 1 overflow.
- Please refer to 'Easy 6 Step Tank Installation Guide' for instruction to install accessories.
- All dimensions are in Metres and rounded to the nearest Centimetre.
- Capacities & measurements are tested in accordance with AS4766, but may vary due to roto-moulding process.
- Bushmans recommends top and sides clearance of 100mm minimum when estimating space required for tank.

Bushmans

BUSHMANS GROUP PTY LTD
BUSHMANS HEAD OFFICE
GPO 4218, NSW, SYDNEY, 2001 WWW.BUSHMANTANKS.COM.AU

Copyright 2022 Bushmans Group Pty Ltd. This drawing may not be reproduced or transmitted in any form or by any means in part or whole without written permission of Bushmans Group Pty Ltd.

Drawn: TANK	Project Title: TXD3300 V003	Drawing Title: TXD3300 ROUND 15,000L TANK TANK SALES DRAWING	
Date: 26/04/2022	Material: POLYETHYLENE		
Scale: NOT TO SCALE	Finish	A3 Size Drawing	Version: V2