


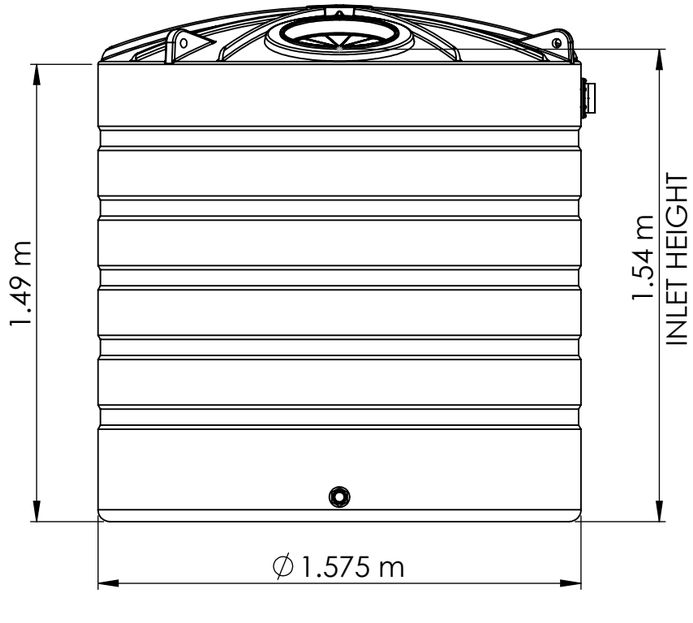


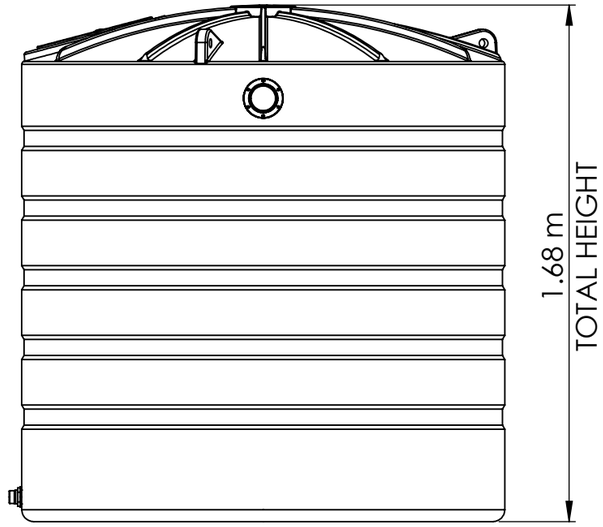

Lifting Information:
Lifting lugs design to suit a bow shackle
with 25mm pin and 43mm inside width.
SG1.0 WLL 110kg using all three lugs.
Lift only empty tank.
Use only certified lifting equipment.
Max. 60° between adjacent chain slings.
Ensure all chains/slings are tensioned.

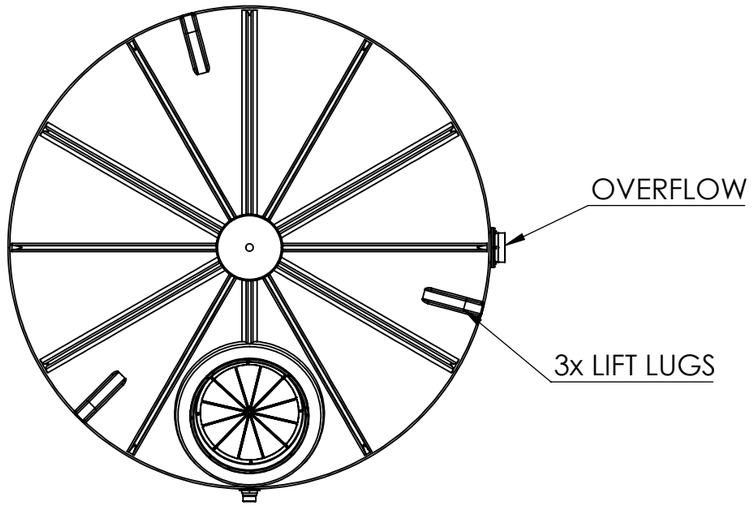

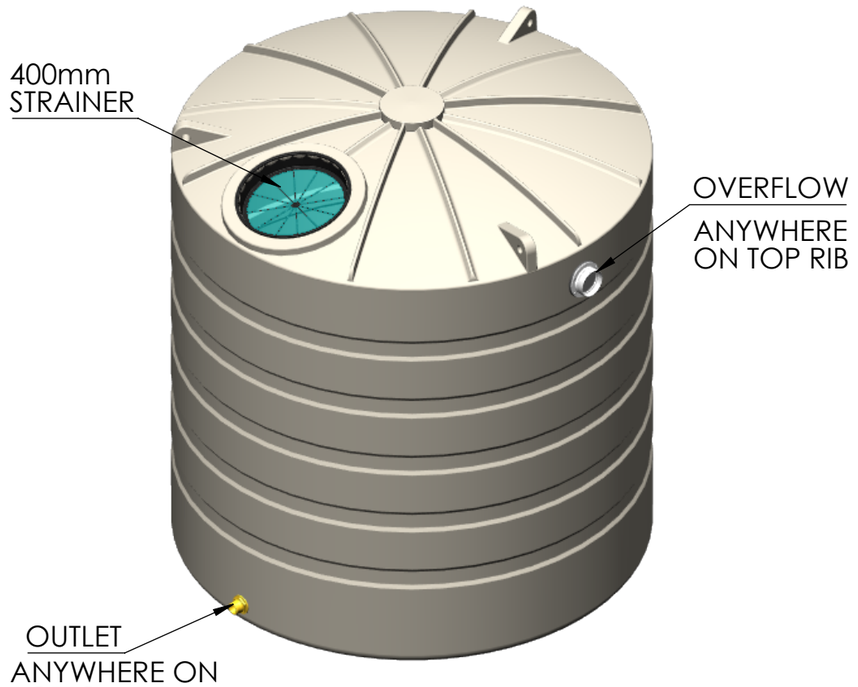

CALCULATED CAPACITY: 2750 Litres

IMPORTANT NOTES TO READ...!!!

- **2 PERSONS + DRIVER REQUIRED TO HANDLE TANK.**
- Drawing shows all available outlet & overflow positions. Standard installations have only 1 outlet & 1 overflow.
- Please refer to 'Easy 6 Step Tank Installation Guide' for instruction to install accessories.
- All dimensions are in Metres and rounded to the nearest Centimetre.
- Capacities & measurements are tested in accordance with AS4766, but may vary due to roto-moulding process.
- Bushmans recommends top and sides clearance of 100mm minimum when estimating space required for tank.

BUSHMANS GROUP PTY LTD

BUSHMANS HEAD OFFICE

GPO 4218, NSW, SYDNEY, 2001 WWW.BUSHMANTANKS.COM.AU

Copyright 2022 Bushmans Group Pty Ltd. This drawing may not be reproduced or transmitted in any form or by any means in part or whole without written permission of Bushmans Group Pty Ltd.

Drawn	Project Title	Drawing Title
TP	TXD560 V001	TXD560 2600 Litre Tank Tank Sales Drawing
Date: 17/11/2022	Material: LLDPE	
Scale: 1:20	Finish: -	
		A3 Size Drawing — Sheet of